

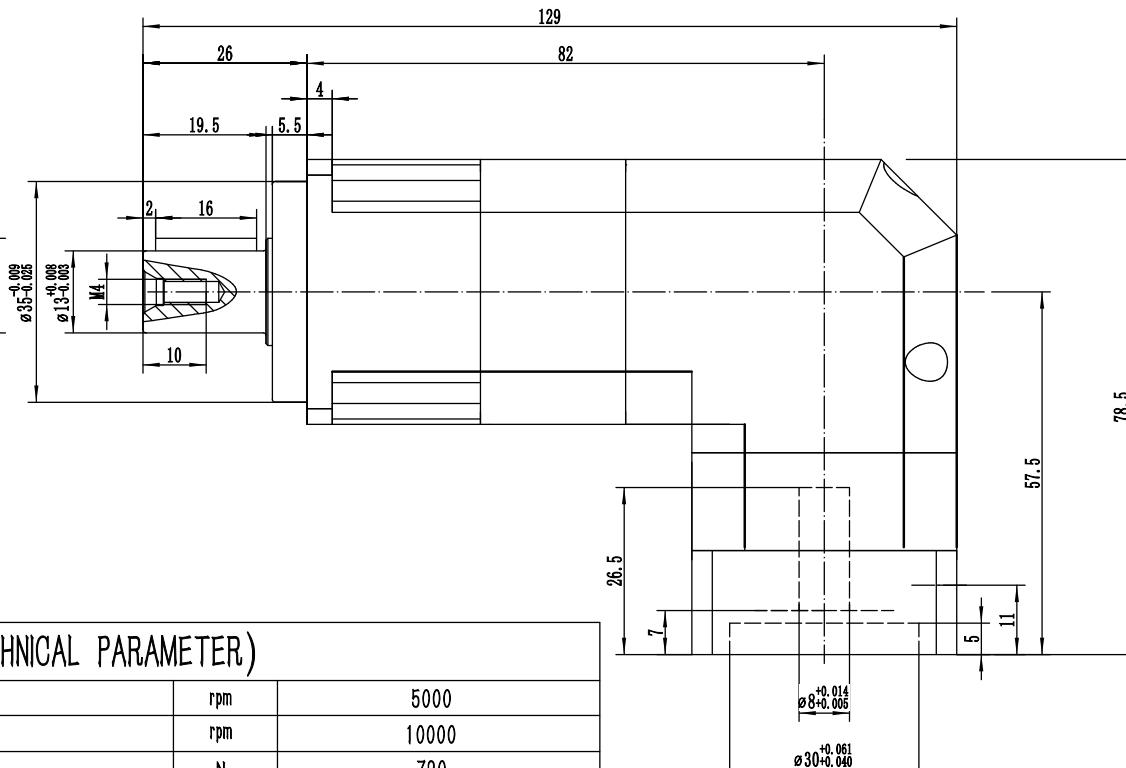


输出端 (output)

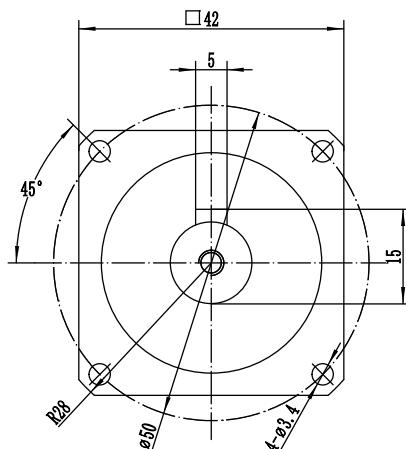

输入端 (input)

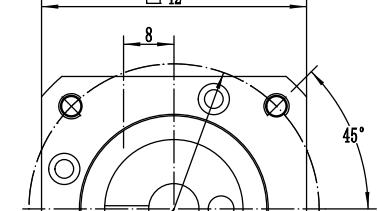

技术特性 (TECHNICAL PARAMETER)

额定输入转速 / (Rated input speed)	rpm	5000
最大输入转速 / (Max input speed)	rpm	10000
最大径向负载 / (Max radial load)	N	720
最大轴向负载 / (Max axial load)	N	360
回程间隙 / (Precision)	arcmin	P1<10, P2<14
使用寿命 / (Service life)	hr	20000
工作温度 / (Operating temperature)	°C	-20~90
扭转刚度 / (Torsional stiffness)	Nm/arcmin	3
润滑方式 / (Lubrication method)		终身润滑 (Lubrication for life)
安装方式 / (Installation mode)		任意 (Any)
防护等级 / (Protection level)		IP65
满载效率 / (Efficiency)	%	94
噪音 / (Noise)	dB(A)	<70 (i=100)
转动惯量 / (Inertia moment)	Kg.cm²	0.03 0.03 0.03 0.03 0.03 0.03 0.03 0.03 0.03 0.03
最大输出扭矩 / (Max output torque)	N.m	14 18 18 22 14 19 18 22 19 14
3倍额定输出扭矩 / (3 times Rated output torque)	N.m	
转动惯量 / (Inertia moment)	Kg.cm²	

签字或盖章/Sign or seal

阶段标记 / STAGE DATE	重量 / WEIGHT	比例 / RATIO
		1:1
TOTAL PAGE 第 页 / 页		

型号 / TYPE
ABR042-L2-P2-8-30-46-M4
视图方式 / VIEW MODE
○ ⊙

高精密行星减速机
High precision planetary reducer