

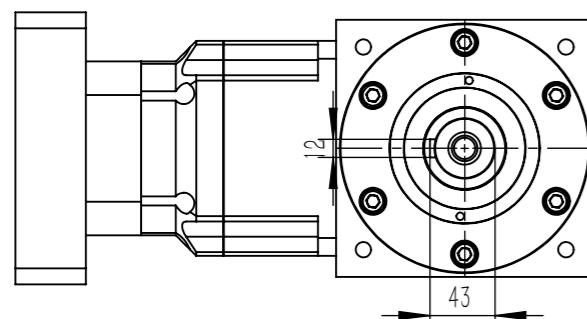



A

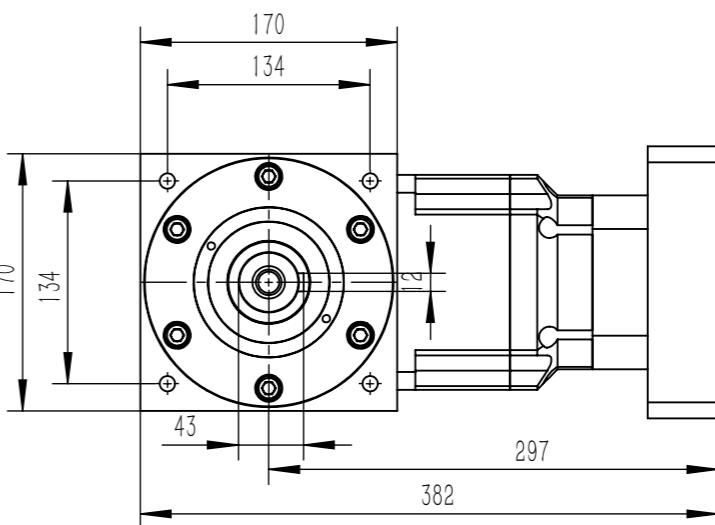


B

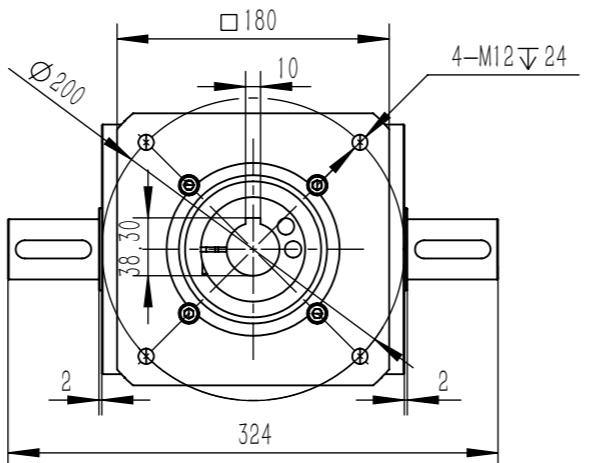

C

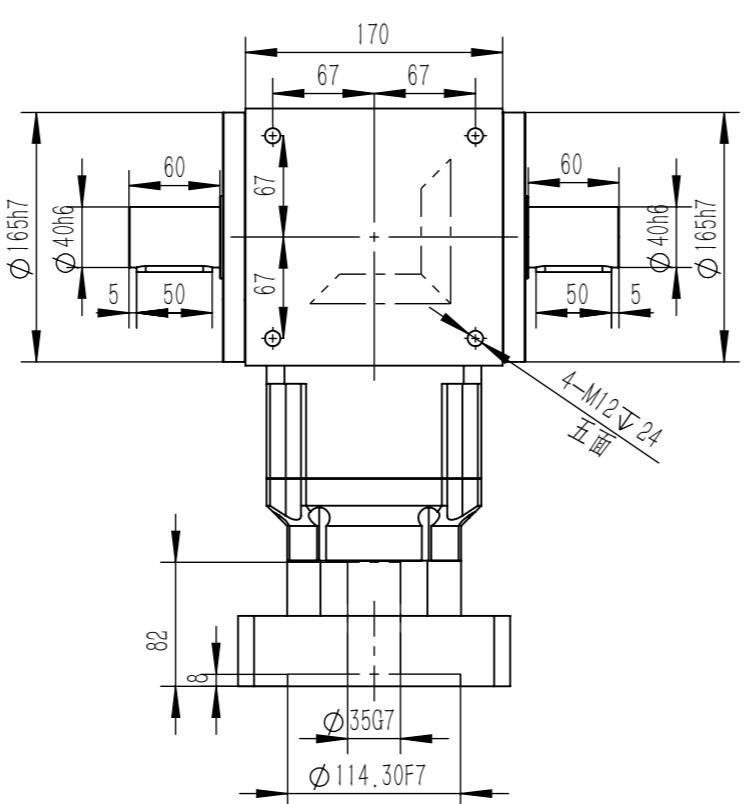

D

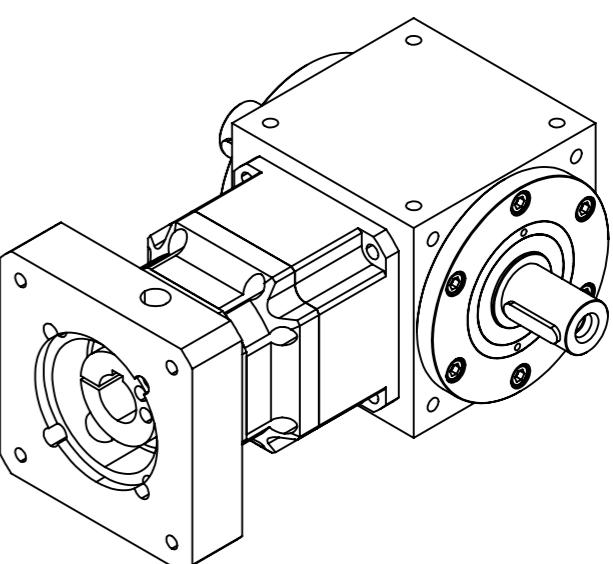

零件代号

借(通)用件登记

描图

描校

速比	12-100							
额定输出扭矩 $T_{2N}$	450Nm							
急停扭矩 $T_{2NOT}$	2.5倍额定输出扭矩							
噪音值	$\leq 78dB$		使用温度	$-10 \sim +90^\circ C$				
额定输入转速 $n_{IN}$	2000rpm		防护等级	IP65				
最大输入转速 $n_{IB}$	3500rpm		润滑	合成润滑油脂				
转动惯量 $J_1$	$2.8kg \cdot cm^2$		使用寿命	20000hr				
容许径向力 $F_{2B}$	6600N		标准背隙 $P2$	$\leq 8arcmin$				
容许轴向力 $F_{2A}$	3300N		效率 $\eta$	$\geq 95\%$				

材质	-----	名称	转向机
视角		比例	图号
		1:5	AT170-FL-AB142-L2-35J10-114.3-200-M12
设计	.	日期	2025/3/20