



版本 A




输出端
(OUTPUT)

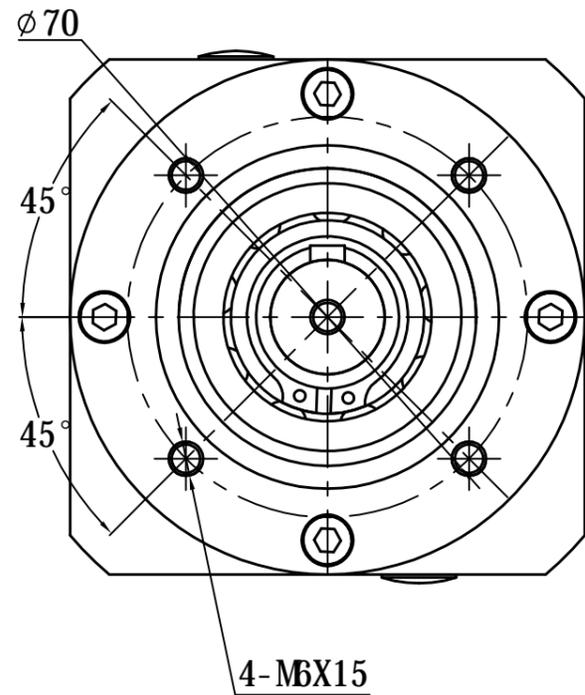

(172)

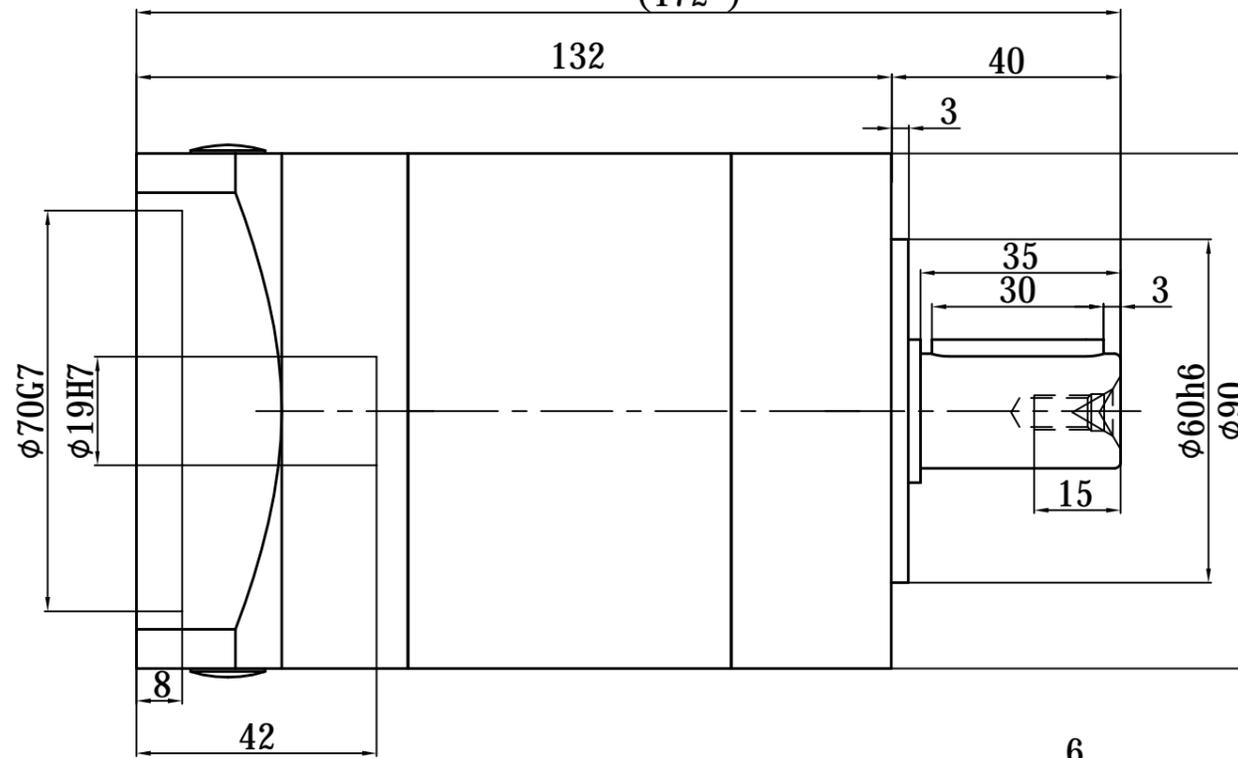

输入端
(INPUT)

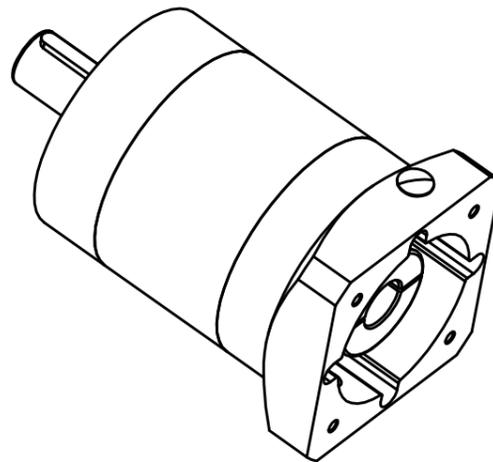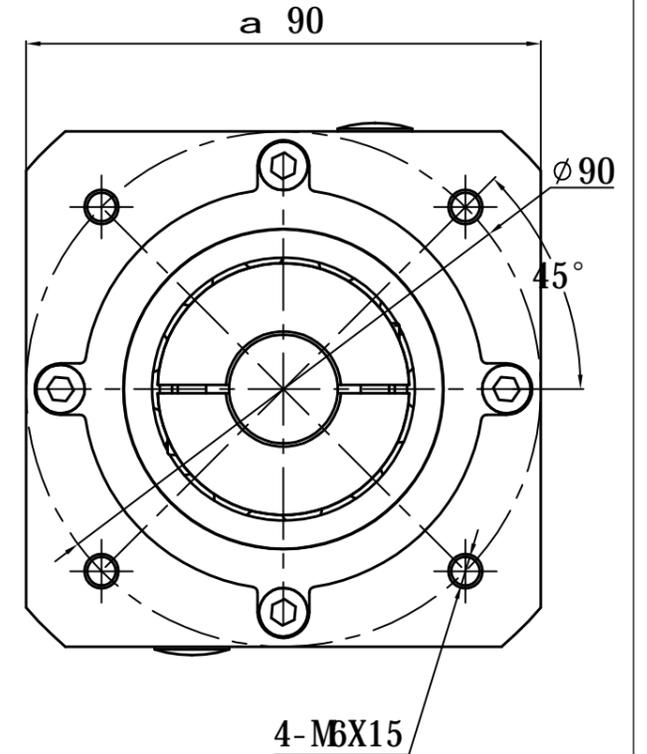

电机尺寸MOTOR DIMENSION: $\phi 19 \times 36 / \phi 70 \times 5 / 4 - \phi 7 - \phi 90$

	100	87	0.291
	70	71.5	0.0283
	50	105.5	0.0283
	40	96	0.0285
	35	105.5	0.0285
	28	96	0.0285
	25	105	0.0291
	20	96	0.0291
	16	96	0.0291
	15	96	0.0291
	12	96	0.0291
选择速比	(A)	(B)	(C)

速比 Ratio	(A):1	使用寿命 Service life	20000hr
额定输出扭矩 Rated output torque	(B)Nm	噪音值 Noise	≤58dB
转动惯量 Moment of inertia	(C)Kg.cm ²	效率 Efficiency	≥95%
额定输入转速 Rated input speed	3000rpm	使用温度 Operating temperature	-10~+90℃
最大输入转速 Maximum input speed	6000rpm	防护等级 Protection level	IP65
容许径向力 Maximum radial force	1020N	润滑 Lubricating	合成润滑油脂 Synthrtic grease lubrication
容许轴向力 Maximum axial force	980N	背隙 Precision	P1≤10 P2≤12

外观图			
标记	处数	更改文件号	签字
设计		会签	
审核		标准化	
工艺		批准	
图样标记			重量
比例			1:1
共1页 第1页			视角
PE-090尺寸图			
PE-090-L2			
2021-11-23			