




输出端
(OUTPUT)

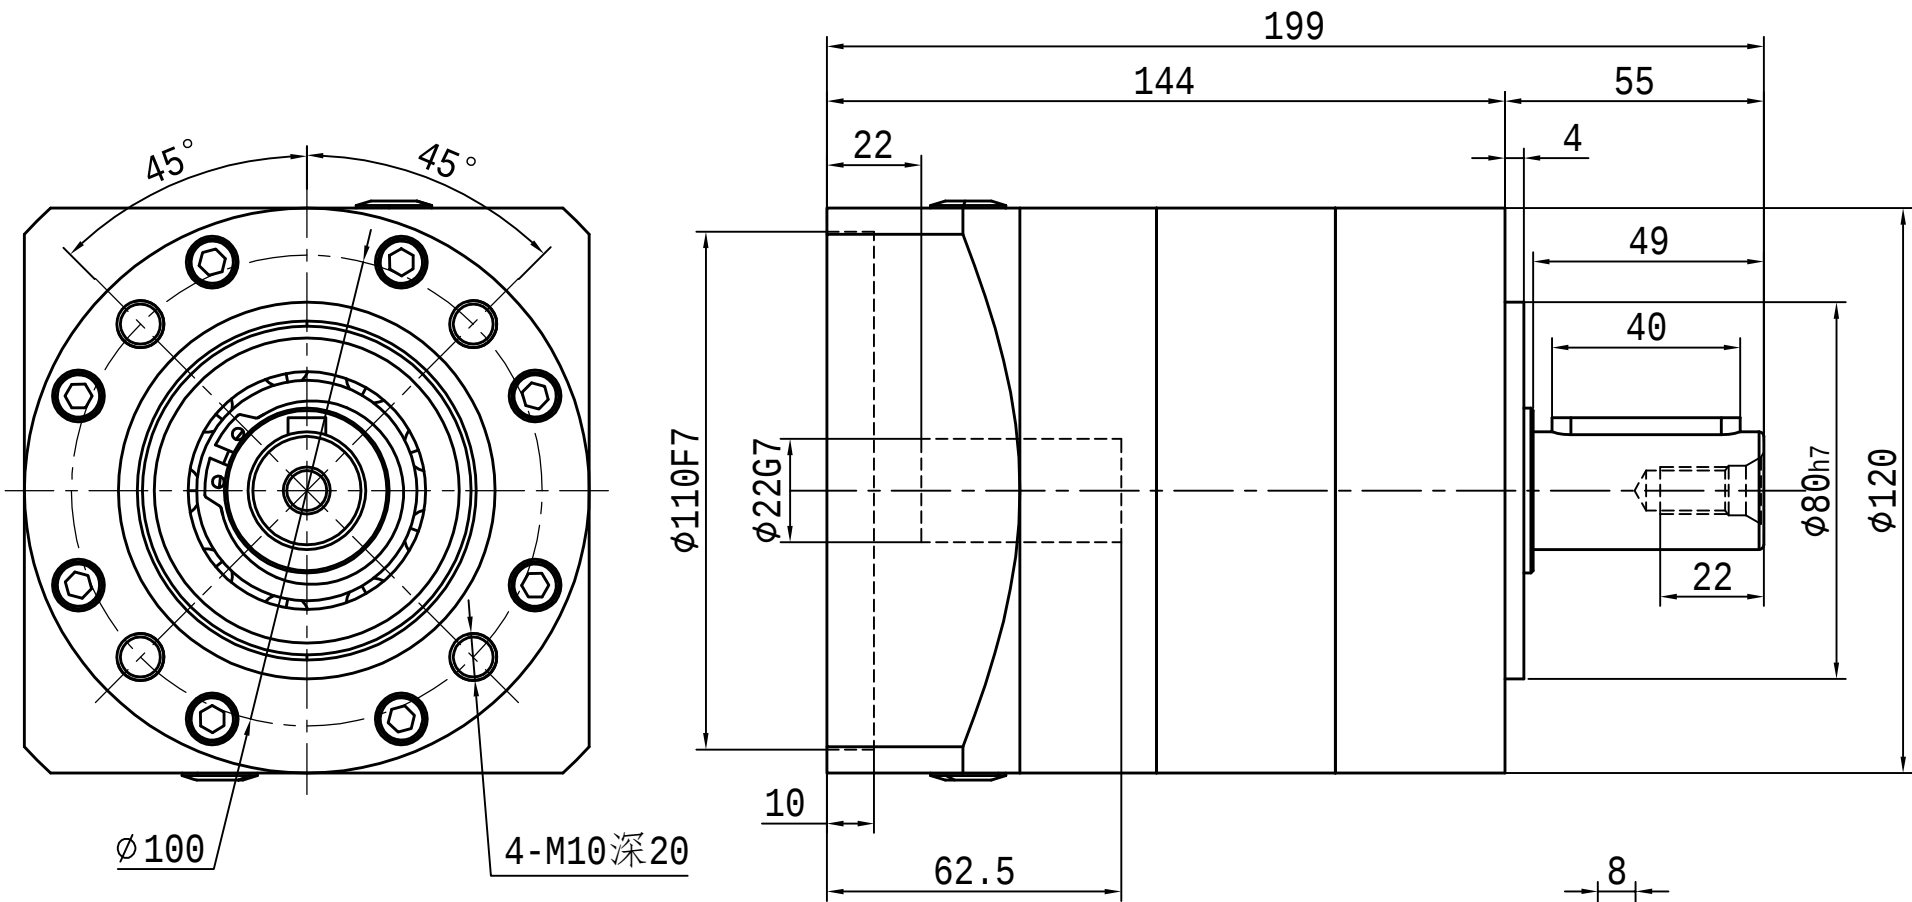

输入端
(INPUT)

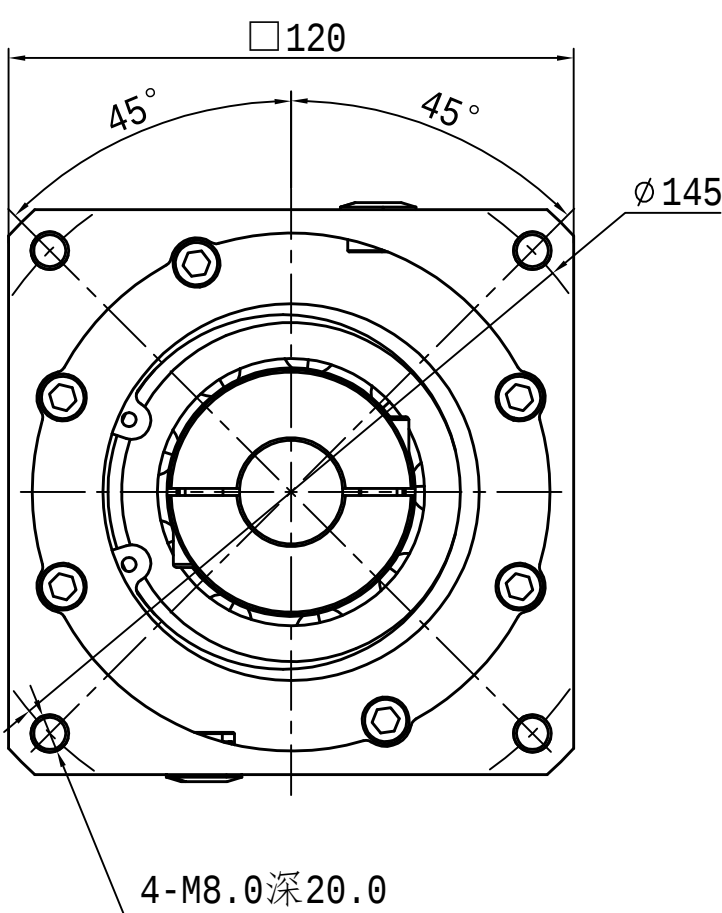

电机尺寸MOTOR DIMENSION: $\phi 22 \times 60 / \phi 110 \times 8 - \phi 9 - \phi 145$

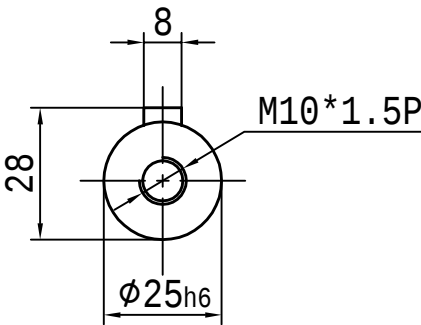

速比 Ratio	(A):1	使用寿命 Service life	20000hr
额定输出扭矩 Rated output torque	(B)Nm	噪音值 Noise	≤58dB
转动惯量 Moment of inertia	(C)Kg.cm ²	效率 Efficiency	≥95%
额定输入转速 Rated input speed	3000rpm	使用温度 Operating temperature	-10~+90℃
最大输入转速 Maximum input speed	6000rpm	防护等级 Protection level	IP65
容许径向力 Maximum radial force	1020N	润滑 Lubricating	合成润滑油脂 Synthrtic grease lubrication
容许轴向力 Maximum axial force	980N	背隙 Precision	P1≤10 P2≤12

	10	93	1.11
	7	158	1.13
	5	235	1.15
	4	222	1.22
	3	148	1.65
选择速比	(A)	(B)	(C)

				外观图						PE-120尺寸图							
标记处数		更改文件号										签字					
设计				会签				图样标记		重量		比例		PE-120-L1			
审核				标准化								1:1					
工艺				批准				共01 页 第 01 页		视角						2021-03-03	