


更新版本2020-09-30

订单号	台数
-----	----

减速机输入端


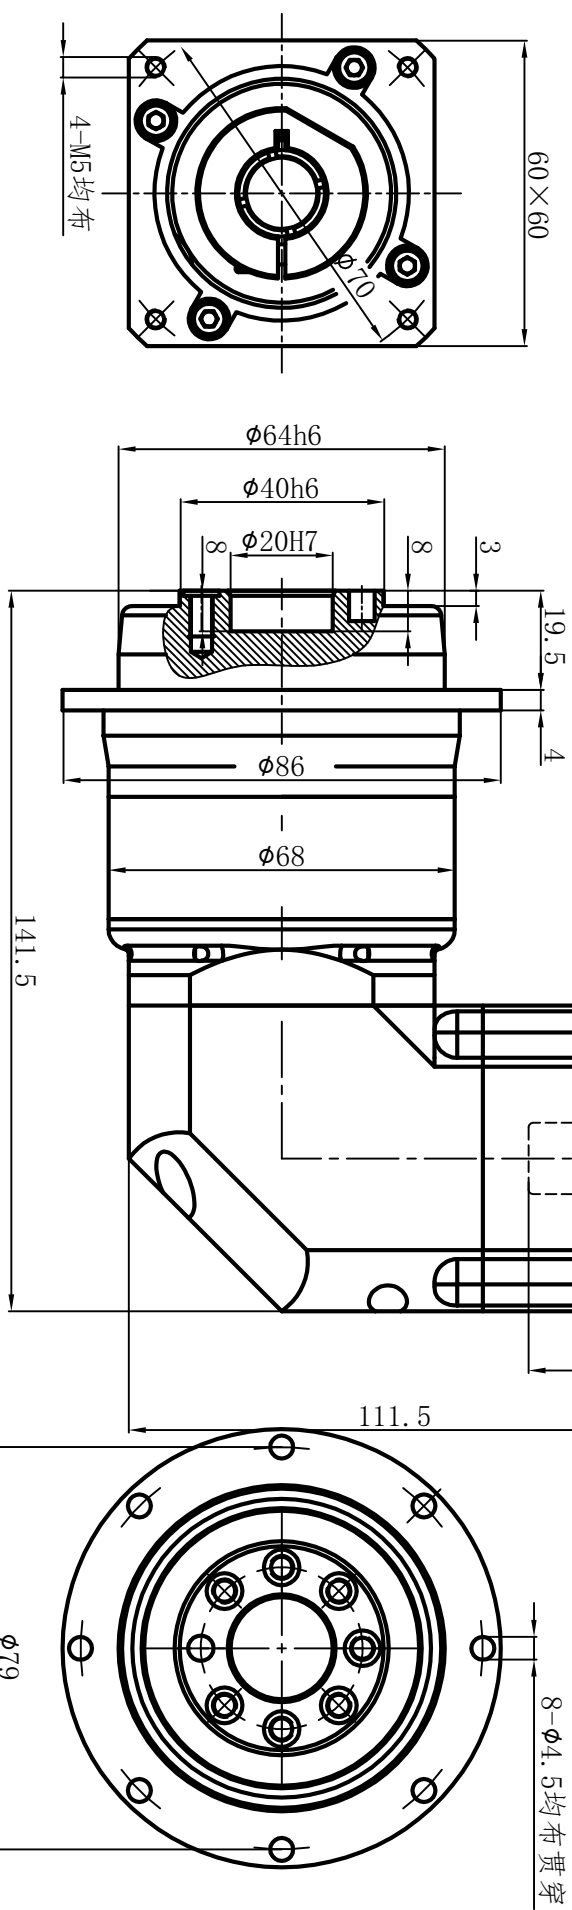


行星减速机技术参数

Technical parameters of planetary reducer	MODEL:	输出端 (Output Terminal)	注意事项 (Notice)
减速比 Reduction ratio	* 20 25 * 35 40 50 70 * 100	Ø5深6	1. 本产品为精密零部件，应放置于干燥的地方保管。 The product is a precise part and it should be stored in a dry place.
额定扭矩 Rated torque bureau	* 50 60 * 50 45 60 50 * 40	Ø31.5	2. 装配前应先检查电机与行星减速机各部位连接的尺寸，然后将减速机与电机自然连接。 Before assembling, the size of the connection between the motor and the parts of the gearbox reducer should be checked.
最大扭矩 Maximum torque	2.5 times rated output torque	7-Ø7深1	3. 禁止使用铁锤等重物击打，从而造成轴向力与径向力过大破坏轴承与齿轮。 It is forbidden to hit with hammer or other heavy objects
额定转速 Rated speed	4000rpm		It can cause damage to bearings and gears.
最大转速 Maximum speed	6000rpm		
容许径向力 Allowable radial force	1250N		
容许轴向力 Allowable axial force	1050N		
工作温度 Working temperature	-10° ~ 80°		
背隙 back lash	≤12arcmin		
行星减速机 Planetary Gearhead	Servobox		
TDR60-L2尺寸图			

行星减速机技术参数

MODEL:

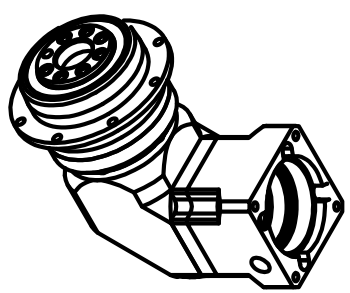

注意事项 (Notice)

1. 本产品为精密零部件，应放置于干燥的地方保管。
The product is a precise part and it should be stored in a dry place.

2. 装配前应先检查电机与行星减速机各部位连接的尺寸，然后将减速机与电机自然连接。
Before assembling, the size of the connection between the motor and the parts of the gearbox reducer should be checked.

3. 禁止使用铁锤等重物击打，从而造成轴向力与径向力过大破坏轴承与齿轮。
It is forbidden to hit with hammer or other heavy objects

It can cause damage to bearings and gears.

行星减速机

Planetary Gearhead

Servobox

TDR60-L2尺寸图