


订单号	台数
-----	----

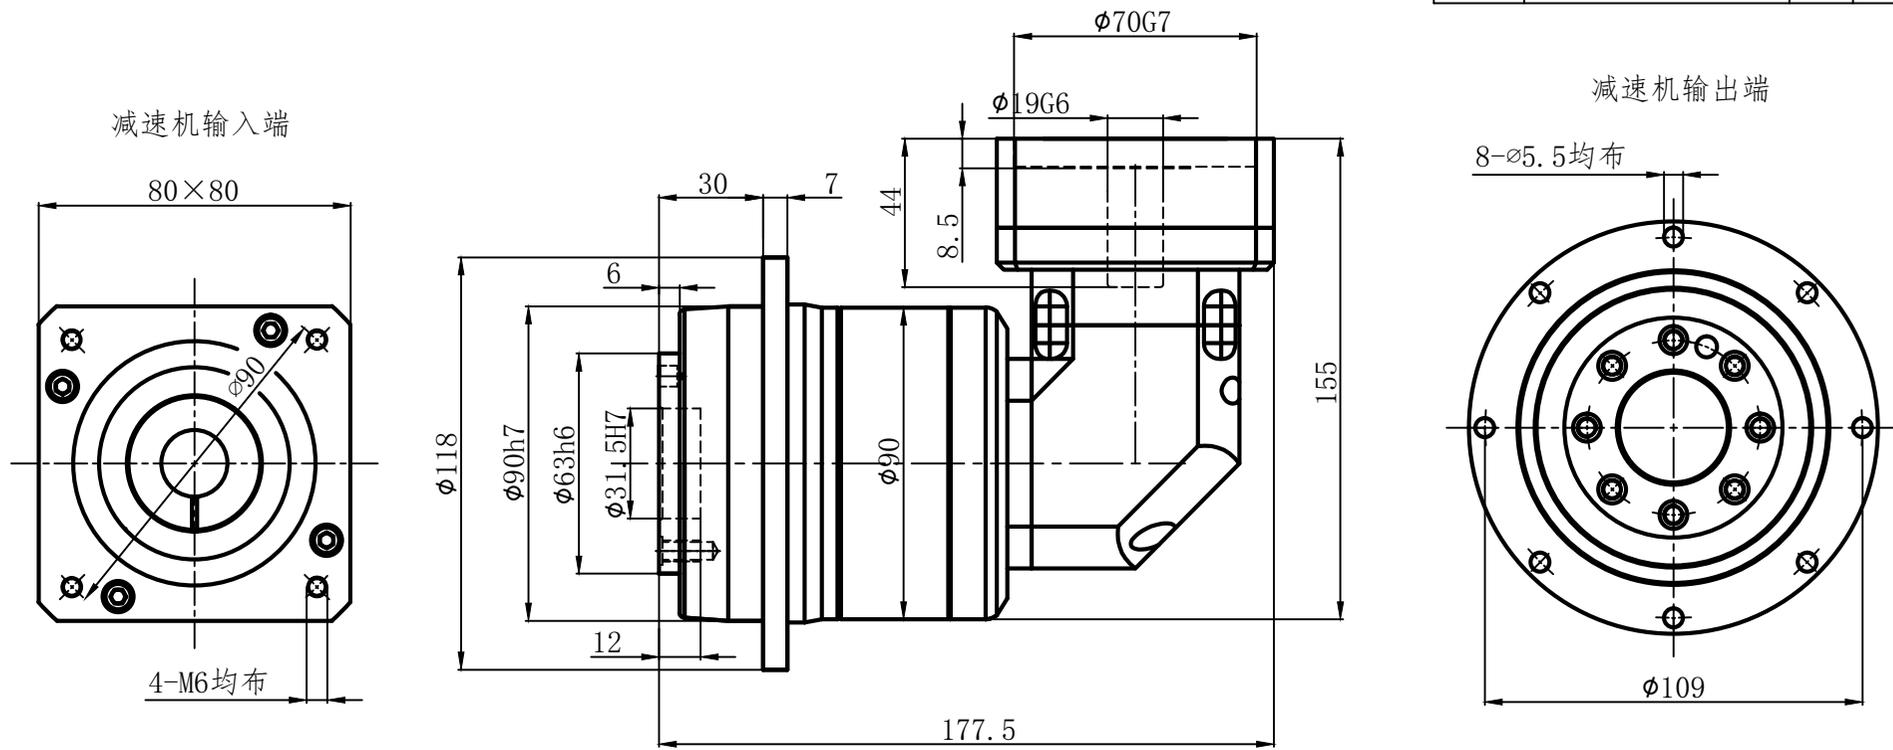

借通用件登记

描图

校描

旧底图总号


签字

日期

行星减速机技术参数
Technical parameters of planetary reducer


减速比 Reduction ratio	20	25	35	40	50	70	100
额定扭矩 Rated torque bureau	130	160	140	130	160	140	100
最大扭矩 Maximum torque	2.5倍额定扭矩 2.5 times rated output torque						
额定转速 Rated speed	4000rpm						
最大转速 Maximum speed	8000rpm						
容许径向力 Allowable radial force	2450N						
容许轴向力 Allowable axial force	2200N						
工作温度 Working temperature	-10° ~90°						

MODEL: TDR90

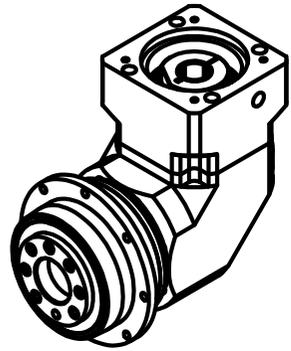

背隙
back lash
≤12arcmin

输出端 (Output Terminal)



注意事项 (Notice)

1. 本产品为精密零部件，应放置于干燥的地方保管。
The product is a precise part and it should be stored in a dry place.
2. 装配前应先应该检查电机与行星减速机各部位连接的尺寸，然后将减速机与电机自然连接。
Before assembling, the size of the connection between the motor and the parts of the gearbox reducer should be checked. Then the reducer is naturally connected to the motor.
3. 禁止使用铁锤等重物击打，从而造成轴向力与径向力过大破坏轴承与齿轮。
It is forbidden to hit with hammer or other heavy objects. It can cause damage to bearings and gears.

设计	校对	核准	标准
处数	更改文件名	签字	日期
共张	第张	日期	

行星减速机
Planetary Gearhead
Servobox

图样标记	重量	比例
		1:1
TDR90-L2尺寸图		