

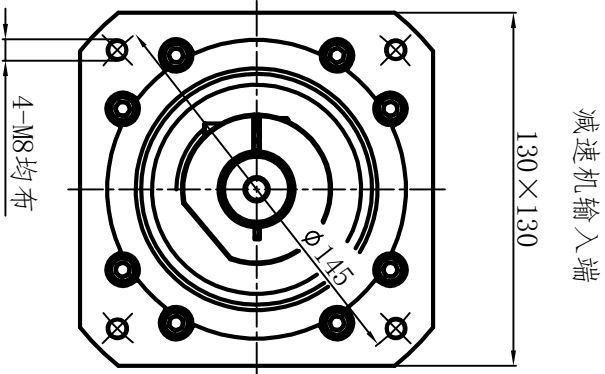




减速比	20	25	35	40	50	70	100
Reduction ratio							
额定扭矩	270	330	300	270	330	300	230
Rated torque bureau							
最大扭矩	2.5倍 额定扭矩						
Maximum torque	2.5 times rated output torque						
额定转速	4000rpm						
Rated speed							
最大转速	8000rpm						
Maximum speed							
容许径向力	4000N						
Allowable radial force							
容许轴向力	4000N						
Allowable axial force							
工作温度	-10° ~ 90°						
Working temperature							

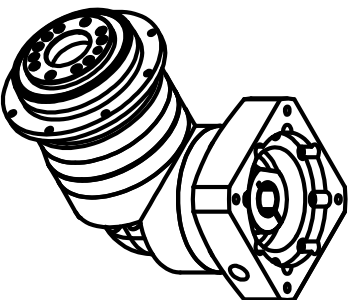

输出端(Output Terminal)
ø6深7

注意事项(Notice)

The product is a precise part and it should be stored in a dry place.

2. 装配前应先检查电机与行星减速机各部位连接的尺寸,然后将减速机与电机自然连接。

Before assembling, the size of the connection between the motor and the parts of the gearbox reducer should be checked. Then the reducer is naturally connected to the motor.

3. 禁止使用铁锤等重物击打, 从而造成轴向力与径向力过大破坏轴承与齿轮。

It is forbidden to hit with hammer or other heavy objects
It can cause damage to bearings and gears.

行星减速机

Planetary Gearhead

box

TDR120-L2尺寸图

背隙
ck lash

 $\leq 12 \text{ arcmin}$