
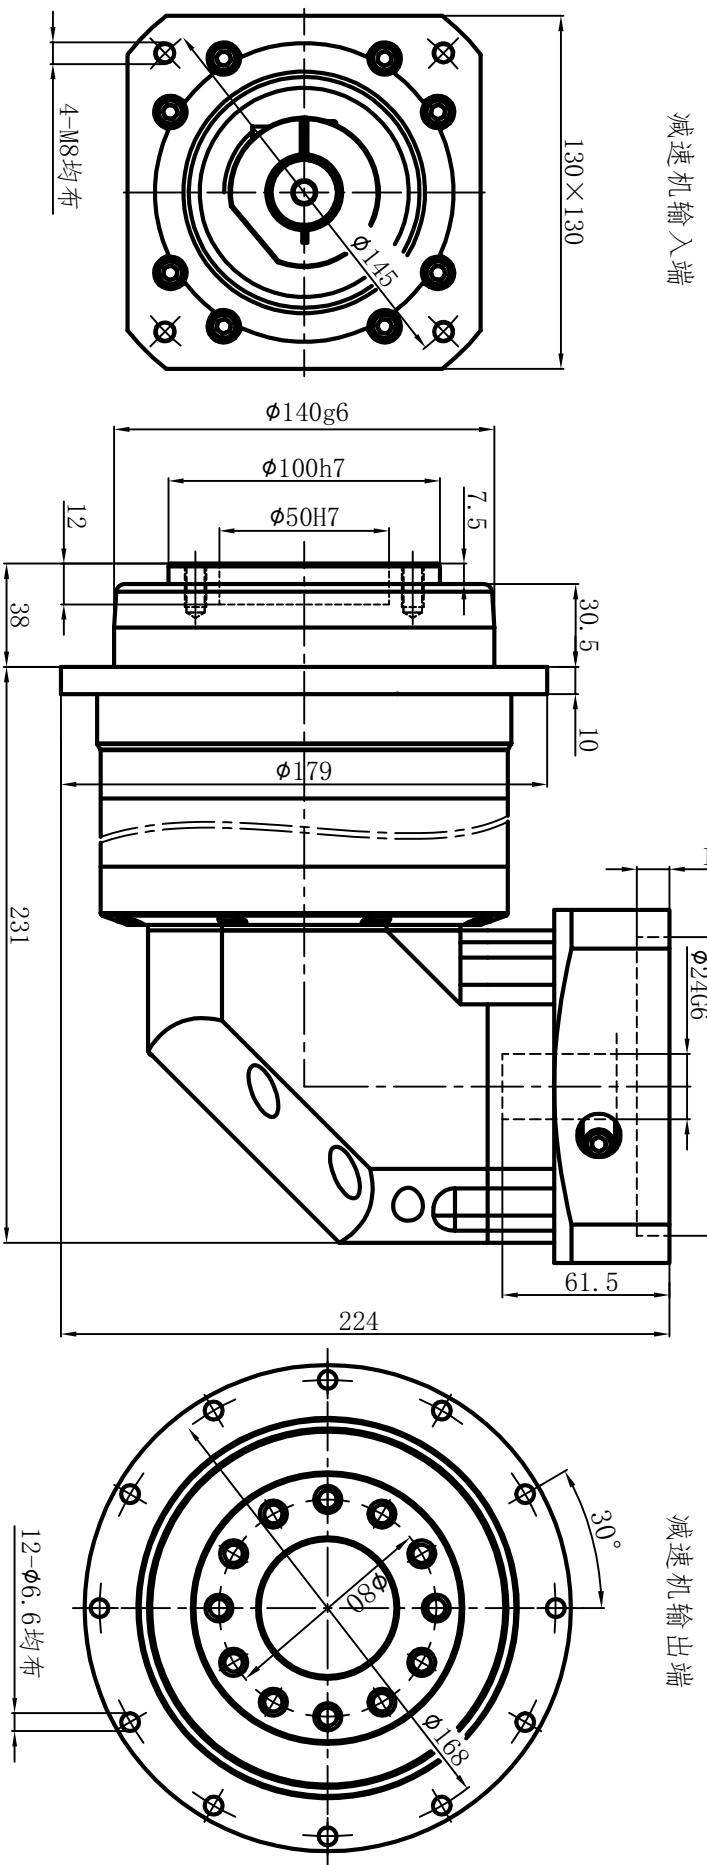



订单号	台数
-----	----

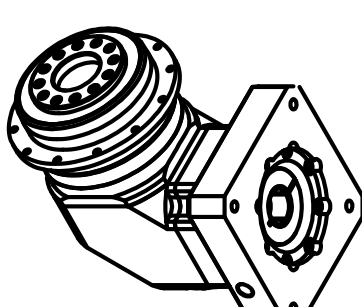

描 图		行星减速机技术参数										输出端 (Output Terminal)				注意事项 (Notice)			
		Technical parameters of planetary reducer										MODEL: TDR140  12-M8 80 50H7				1. 本产品为精密零部件，应放置于干燥的地方保管。 The product is a precise part and it should be stored in a dry place. 2. 装配前应先检查电机与行星减速机各部位连接的尺寸，然后将减速机与电机自然连接。 Before assembling, the size of the connection between the motor and the parts of the gearbox reducer should be checked. Then the reducer is naturally connected to the motor. 3. 禁止使用铁锤等重物击打，从而造成轴向力与径向力过大破坏轴承与齿轮。 It is forbidden to hit with hammer or other heavy objects It can cause damage to bearings and gears.			
校 描		减速比		20	25	35	40	50	70	100									
		额定扭矩		560	650	550	560	650	550	450									
		最大扭矩		2.5 倍额定扭矩															
		额定转速		3000rpm															
		最大转速		6000rpm															
签 字		容许径向力		9400N															
		容许轴向力		10590N															
日 期		工作温度		-10° ~ 90°															
		Working temperature																	
												背隙		≤7arcmin					
												back lash							